



Earaheedy Drilling Results Identify New Horizon

Highlights

- Drilling program at Earraheedy Project completed during Q1, 2023 utilising Exploration Incentive Scheme grant of \$132,000
- Two diamond holes tested VTEM anomalies:
 - Diamond hole EHD001 drilled an EM target east of the known mineralisation envelope and returned intercepts including **5.2m at 0.25% Cu** from 52.8m (including **2.2m at 0.34% Cu**) and **7m at 0.11% Cu** from 116m (including **0.5m at 0.53% Cu**); and
 - Diamond hole EHD002, which was drilled 1.3km west of known mineralisation, returned several gold intercepts including **1m at 0.73 g/t Au** from 246m in addition to copper intercepts such as **2m at 0.11% Cu** from 190m
- RC hole EHRC004, which was drilled to follow up Peak's 2021 intersection of **3m at 1.5% Cu**, intersected **2m at 0.11% Cu** from 118m and ended in 5m of mafic volcanics
- Anomalous Au, As, Cu, Zn, Ni and Pb intercepts were identified in completed holes as well as the presence of mafic rocks indicating evidence of a potential VMS system

Peak Minerals Limited (ASX: PUA) (Peak or the Company) is pleased to provide the results from its co-funded drilling program at its 100% owned Earraheedy Project, located 28km southeast of Sandfire Resources Ltd's (ASX: SFR) DeGrussa Copper Gold Mine, within the Murchison province of Western Australia.

The program, which utilised the \$132,000 grant awarded to the Company under the Western Australian Government's Exploration Incentive Scheme (EIS), was completed during Q1, 2023. The two diamond holes were drilled to test mineralisation models, faults and stratigraphy. Understanding the stratigraphy, mineralisation relationships and alteration at Earraheedy are pivotal to unlocking value and moving the project forward. The program was also designed to provide further understanding on faults (potential fluid conduits) and the elevated copper, nickel, cobalt, zinc, lead and sulphur values in an extensive (1.1km x 2.0km) blanket.

The first diamond drill hole, EHD001, targeted a versatile time domain electromagnetic (VTEM) anomaly identified from recent geophysical processing, proximal to the previously identified copper blanket and testing

Peak Minerals Limited

Registered Office: Level 1, Suite 23, 513 Hay St, Subiaco WA 6008

Email: admin@peakminerals.com.au

ACN: 072 692 365

www.peakminerals.com.au

the depth to basement and mineralisation potential proximal to faults. The hole hit multiple zones of low-grade mineralisation and intercepted **7m at 0.11% Cu** from 116m and **5.2m at 0.25% Cu** from 52.8m.

The results from EHD001 indicate that detected conductivity was the result of lithological and chemical changes in the rock below 220m depth. Positions of faults were confirmed; the orientations are mainly NW-SE (steeply dipping ~80°). Bedding has a shallow dip (~30°) to the NNW as expected. It is interpreted that turbiditic dolostones of the Doolgunna Fm were intercepted below Earaaheedy basin sediments, though not the expected basement rocks; it does answer the question of depth of the basin at this western extent of Earaaheedy.

The second diamond hole, EHD002, was drilled distal to known mineralisation, targeted conductivity at depth, and a major stratigraphic contact. The hole's target area was also a target to previous explorers, where elevated cobalt and magnetics profile made the area highly prospective.

Copper mineralisation was lower than expected from initial visual estimates where chalcopyrite, malachite and strong alteration were seen. The highest intercepts, at the contact of siltstones and dolostones below, was **1m at 0.15% Cu** from 159m, **2m at 0.11% Cu** from 190m, **2m at 0.11% Cu** from 205m and **1m at 0.11% Cu** from 249m. Several 1m intercepts of gold were also drilled including **1m at 0.73 g/t Au** from 246m, **1m at 0.63 g/t Au** from 359m and **1m at 0.60 g/t Au** from 419m.

Most of the gold intercepts appear to be related to a separate event and were unexpected within small quartz carbonate veins. Indicator elements suggest this hole is away from the source of the copper mineralisation, however, gold at these levels has not been drilled previously at Earaaheedy. Bedding has a shallow dip (~5-30°) to the NNW but shifts to a westerly dip direction below the Johnson Cairn siltstones. Fault orientations are mainly NW-SE (dipping ~50°). Evidence of folding was more evident in this hole; dolostones in the footwall were turbiditic and complex.

The reverse circulation (RC) hole (EHRC004) was following up on the 2021 intersection of **3m at 1.5% Cu¹** from 86m, which ended in mineralisation. The hole ended in **5m at 0.09% Cu**, including **2m at 0.11% Cu** within mafic rocks.

Dolerites or basalts have never been intersected at Earaaheedy and defining the position of these was an aim of this program. This area has no interesting geophysical anomalism that would indicate mineralisation but suggests it's within a broad fault zone. A recent geochemical review suggested that there are strong targets to the SW of the weak copper mineralisation.

¹ Refer ASX release dated 2 December 2021 for further information.

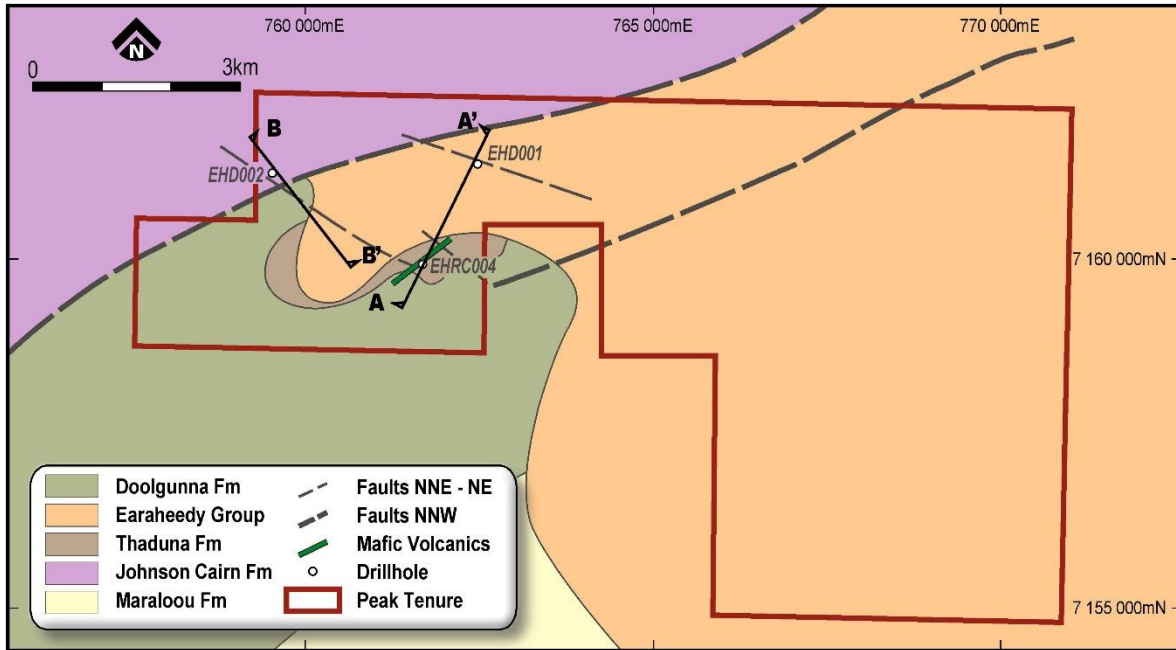


Figure 1. Overview Map with interpreted geology adjusted based on recent drilling. Sections A-A' and B-B' are referred to in Figures 2 and 3.

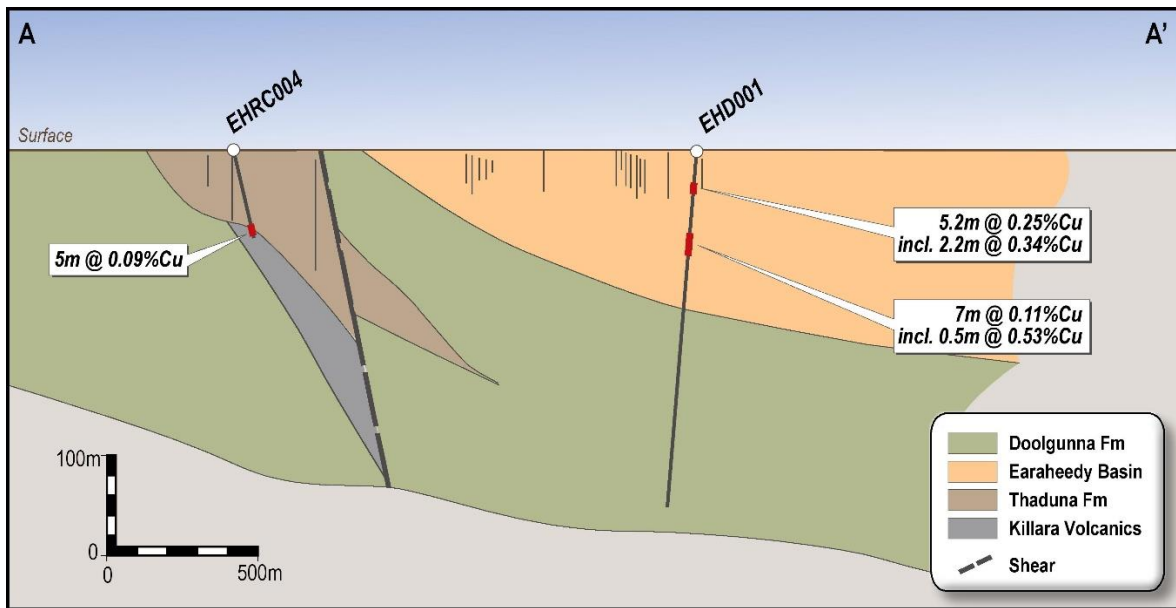


Figure 2. Sections A-A' showing geological interpretation based on logging and plan map in Figure 1.

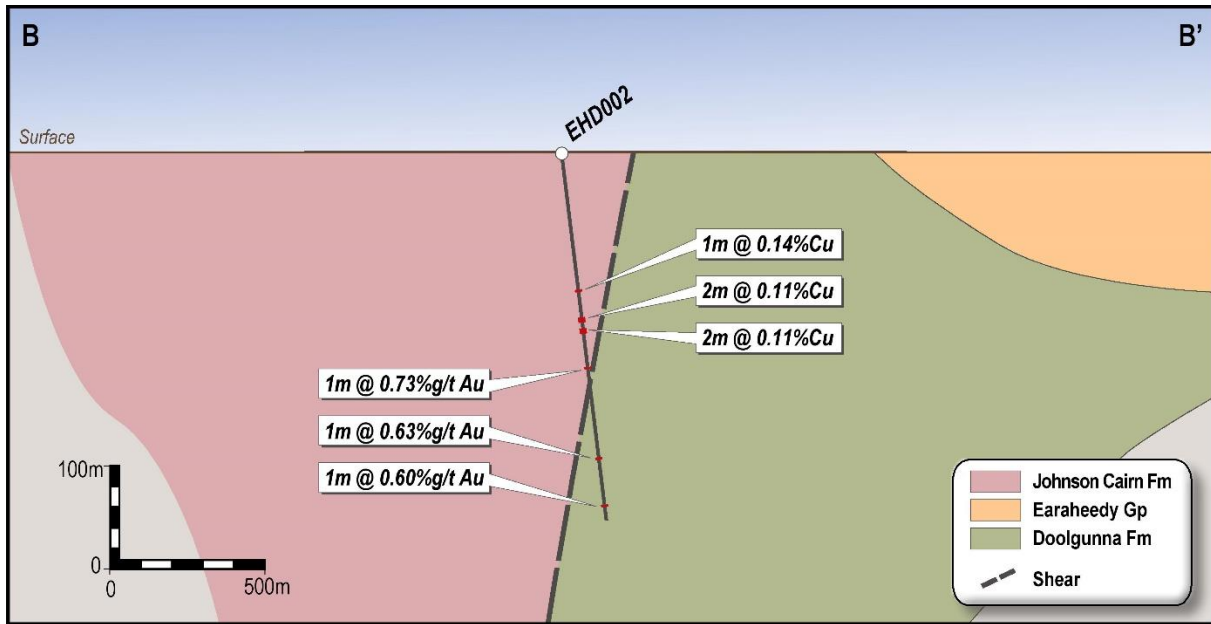


Figure 3. Section B-B' showing interpreted geological section.

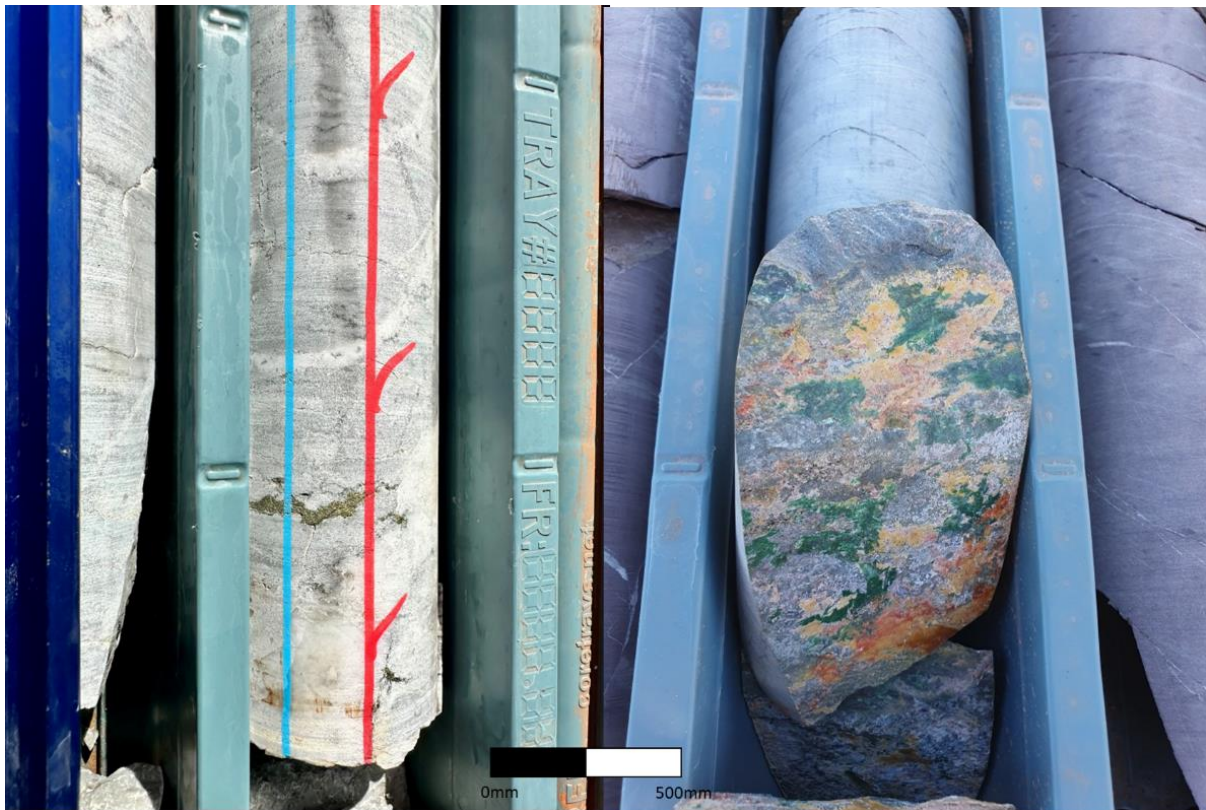


Figure 4. Copper as chalcopyrite in EHD001 as infill and replacement at 116.7m (left) and along fractures in EHD002 commonly as malachite and chrysocolla at 159.2m.

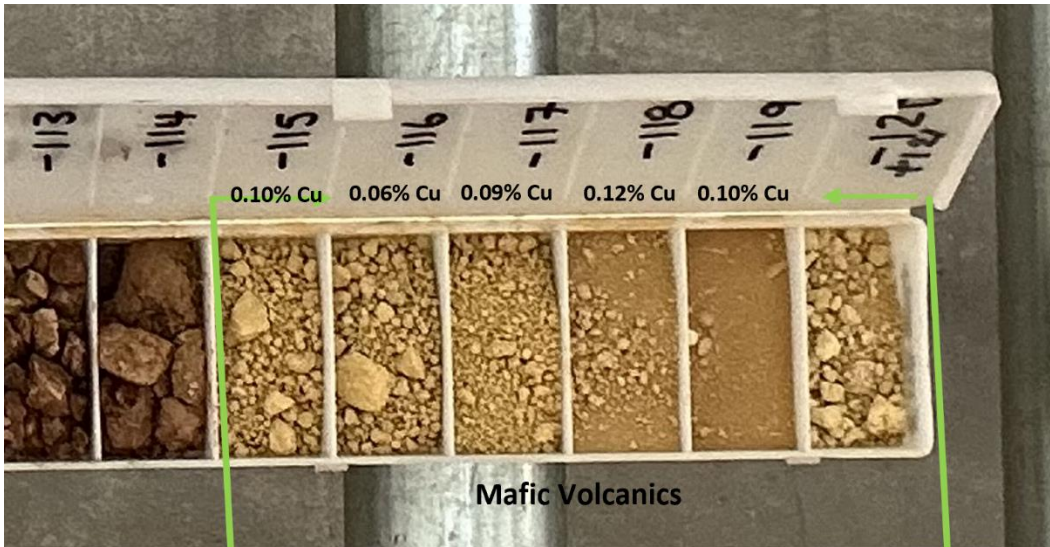


Figure 5. RC Chips from EHR004, the last 5m are in mafic volcanics with low grade Cu mineralisation.

This announcement is authorised by the Board of Peak Minerals Limited.

For further information please contact:

Jennifer Neild
Chief Executive Officer
Peak Minerals Limited
Tel: +61 8 6143 6748

Competent Person Statement

The information in this announcement that relates to new exploration results is based on information compiled by Ms Jennifer Neild, who is a Member of the Australian Institute of Geoscientists. Ms Neild is employed by Peak Minerals Limited. Ms Neild has sufficient experience which is relevant to the style of mineralisation and type of deposit under consideration and to the activity which she is undertaking to qualify as a Competent Person as defined in the 2012 Edition of the 'Australasian Code for Reporting of Exploration Results, Mineral Resources and Ore Reserves'. Ms Neild consents to the inclusion in this announcement of the matters based on her information in the form and context in which it appears.

This information in this announcement that relates to historical exploration results were reported by the Company in accordance with listing rule 5.7 on 2 December 2021 (*Copper Mineralisation Extends Across Earahedy Project*). The Company confirms that the form and context in which the Competent Person's findings are presented have not been materially modified from the original market announcement.

APPENDIX A: Drill hole location details and significant intercepts
Table 1. Hole locations at Earraheedy Project

HOLEID	EASTING	NORTHING	ELEVATION	DEPTH	AZIMUTH	DIP	TYPE
EHD001	762574	7161361	557	411	174	-69	DIAMOND
EHD002	759621	7161227	565	400	172	-68	DIAMOND
EHRC004	761779	7159913	560	127	359	-55	RC

Table 2. EHD001 Selected intercepts using weighted average grade >0.1% Cu, >0.5g/t Au, >0.1% Pb. "BD" is below detection.

HOLEID	From	To	Interval	Au gpt	Cu %	Ni %	Pb %	S %
EHD001	5	6.4	1.4	0.010	0.038	0.004	0.178	0.045
EHD001	6.4	7.9	1.5	0.021	0.060	0.007	0.201	0.026
			2.9	0.016	0.049	0.006	0.189	0.035
EHD001	21	22	1	0.505	0.124	0.015	0.049	0.017
EHD001	52.8	54.2	1.4	0.022	0.207	0.019	0.004	0.027
EHD001	54.2	56.4	2.2	0.011	0.338	0.067	0.002	0.033
EHD001	56.4	57.1	0.7	0.006	0.105	0.011	BD	0.007
EHD001	57.1	58	0.9	0.0001	0.186	0.022	0.001	0.010
			5.2	0.011	0.245	0.039	0.002	0.024
EHD001	116	116.5	0.5	0.009	0.057	0.001	BD	0.215
EHD001	116.5	117	0.5	BD	0.531	0.001	X	0.693
EHD001	117	118	1	0.009	0.089	0.001	X	0.212
EHD001	118	119	1	BD	0.071	0.000	X	0.254
EHD001	119	120	1	BD	0.042	0.000	X	0.301
EHD001	120	121	1	BD	0.083	0.000	X	0.181
EHD001	121	122	1	BD	0.056	0.000	X	0.206
EHD001	122	123	1	BD	0.098	0.001	X	0.170
			7	BD	0.105	0.000	X	0.254
EHD001	165	166	1	BD	0.119	0.001	0.005	0.243
EHD001	198	199	1	BD	0.140	0.001	X	0.357
EHD001	236	237	1	BD	0.171	0.001	X	0.217

Table 3. EHD002 Selected intercepts using weighted average grade >0.1% Cu, >0.5g/t Au, >0.1% Pb. "BD" is below detection.

HOLEID	From	To	Interval	Au gpt	Cu %	Ni %	Pb %	S %
EHD002	158	159	1	0.014	0.037	0.016	BD	0.010
EHD002	159	160	1	0.026	0.146	0.017	BD	0.036
			2	0.020	0.091	0.016	BD	0.023
EHD002	190	191	1	0.008	0.093	0.016	BD	0.025
EHD002	191	192	1	0.006	0.134	0.016	BD	0.038
			2	0.007	0.113	0.016	BD	0.032
EHD002	205	206	1	0.016	0.086	0.015	BD	0.024
EHD002	206	207	1	0.001	0.124	0.015	BD	0.034
			2	0.008	0.105	0.015	BD	0.029
EHD002	246	247	1	0.726	0.001	0.015	BD	BD
EHD002	249	250	1	0.006	0.108	0.016	BD	0.030
EHD002	419	420	1	0.599	BD	BD	BD	0.012
EHD002	359	360	1	0.628	0.0002	0.0003	BD	0.099

Table 4. EHR004 Selected Intercepts using weighted average grade >0.1% Cu, >0.5g/t Au and >0.1% Pb.

HOLEID	From	To	Interval	Au gpt	Cu %	Ni %	Pb %	S %
EHD004	115	116	1	0.001	0.101	0.017	0.004	0.035
EHD004	116	117	1	0.014	0.056	0.014	0.003	0.046
EHD004	117	118	1	0.001	0.090	0.016	0.006	0.056
EHD004	118	119	1	0.009	0.122	0.023	0.007	0.050
EHD004	119	120	1	0.001	0.101	0.021	0.005	0.056
			5	0.005	0.094	0.018	0.005	0.049

APPENDIX B: JORC Code, 2012 Edition – Table 1
Section 1 Sampling Techniques and Data

(Criteria in this section apply to all succeeding sections.)

Criteria	JORC Code explanation	Comments
Sampling techniques	Nature and quality of sampling (eg cut channels, random chips, or specific specialised industry standard measurement tools appropriate to the minerals under investigation, such as down hole gamma sondes, or handheld XRF instruments, etc). These examples should not be taken as limiting the broad meaning of sampling.	RC and diamond intervals were systematically sampled using standard 1m samples. Some intervals were less or more than 1m at geological contacts and prospective veining. Other unusual intervals were the result of poor diamond core recoveries.
	Include reference to measures taken to ensure sample representivity and the appropriate calibration of any measurement tools or systems used.	All RC samples were collected using industry standard practices, where 2-3kg samples were collected by spear from the drill piles. All care was taken to ensure a representative sample of each metre. Diamond core is half cut along downhole orientation lines. Half core is sent to the laboratory for analysis and the other half is retained for future reference. Samples were sent for lab analysis.
	Aspects of the determination of mineralisation that are Material to the Public Report. In cases where 'industry standard' work has been done this would be relatively simple (eg 'reverse circulation drilling was used to obtain 1 m samples from which 3 kg was pulverised to produce a 30 g charge for fire assay'). In other cases, more explanation may be required, such as where there is coarse gold that has inherent sampling problems. Unusual commodities or mineralisation types (eg submarine nodules) may warrant disclosure of detailed information.	The speared 2-3kg samples were collected in labelled calico bags and grouped in 10 samples polyweave bags. Half core is sent to the laboratory for analysis and the other half is retained for future reference. For RC and diamond core (both HQ and NQ2). Samples less than 3kg are crushed to 2mm, dried and then pulverised. The samples were prepared at the laboratory with a 0.25g sample prepared for the (4) acid multi-element digest and ICP-OES finish. These elements are: Ag, Al, As, Ba, Be, Ca, Cd, Ce, Co, Cr, Cu, Fe, K, La, Li, Mg, Mn, Mo, Na, Ni, P, S, Sb, Sc, Sn, Sr, Te, Ta, Tl, W, Zn and Zr. The sample is digested with, hydrochloric, acid to effect a total dissolution of the sample. The sample is then analysed using ICP-OES. For gold analysis 25g lead charge also an ICP-OES finish.

Drilling techniques	Drill type (eg core, reverse circulation, open-hole hammer, rotary air blast, auger, Bangka, sonic, etc) and details (eg core diameter, triple or standard tube, depth of diamond tails, face-sampling bit or other type, whether core is oriented and if so, by what method, etc).	The Sandvik multi-purpose drill rig is capable of mud-rotary drilling, reverse circulation and diamond by changing the drill head. Due to ground conditions encountered in Hole EHD001, the collar of EHD002 was drilled using RC drilling down through the regolith to the point of refusal or to a level considered geologically significant to change to core. The hole was then continued using HQ diamond core until the drillers determined that a change to NQ2 coring was required. The core is oriented and marked by the drillers. The core is oriented using ACT Mk II electric core orientation.
Drill sample recovery	Method of recording and assessing core and chip sample recoveries and results assessed.	For RC sample recovery was assessed qualitatively with sample moisture, bulk recovery and quality recorded for each sample.
	Measures taken to maximise sample recovery and ensure representative nature of the samples	Samples were collected from 1m piles and speared directly into calico sample bags. Where possible, samples were collected dry and care was taken for a representative sample of the material. On diamond core, a line was drawn arbitrarily by a field technician to guide core cutting.
	Whether a relationship exists between sample recovery and grade and whether sample bias may have occurred due to preferential loss/gain of fine/coarse material.	It appears that copper mineralisation is most prevalent in vuggy limestones and iron rich terra rosa unit. The poor recovery resulted in a loss of material and less fine material.
Logging	Whether core and chip samples have been geologically and geotechnically logged to a level of detail to support appropriate Mineral Resource estimation, mining studies and metallurgical studies.	Drill holes were geologically logged in their entirety and of a quality sufficient for inclusion in a mineral resource estimation.
	Whether logging is qualitative or quantitative in nature. Core (or costean, channel, etc) photography.	Logging is both qualitative and quantitative in nature and captures the downhole depth, colour, lithology, texture, alteration, mineralisation, and other features of the samples where present.
	The total length and percentage of the relevant intersections logged.	All drill holes were logged in their entirety.
Sub-sampling techniques and sample preparation	If core, whether cut or sawn and whether quarter, half or all core taken.	Diamond core (both HQ and NQ2) is half-core sampled to geological boundaries. Due to core loss in EHD001 several samples were taken over larger intervals than is standard (up to 4.1m). Samples less than 3kg are crushed to 10mm, dried and then pulverised to 75µm. Samples greater than 3kg are first crushed to 10mm then finely crushed to 2mm and input into the rotary splitters to produce a consistent output weight for pulverisation.



	If non-core, whether riffled, tube sampled, rotary split, etc and whether sampled wet or dry.	Samples were collected every metre directly off the rig-mounted cyclone into a calico sample bag. The 1m samples that are not anomalous based on pXRF analysis are securely stored if needed. The cyclone was cleaned regularly. A majority of the samples were dry. 4m composite samples were collected from the centre of the 1m pile by a spear.
	For all sample types, the nature, quality and appropriateness of the sample preparation technique.	Intertek-Genalysis Laboratory undertook oven drying of up to 3kg of sample than crushed. Secondary crushing riffle splitting obtaining a ~2mm subsample for pulverisation.
	Quality control procedures adopted for all sub-sampling stages to maximise representivity of samples.	QAQC reference samples and duplicates were routinely submitted with each sample batch. Additionally, the QAQC from the laboratory was also collected.
	Measures taken to ensure that the sampling is representative of the <i>in-situ</i> material collected, including for instance results for field duplicate/second-half sampling.	Duplicate samples were routinely submitted every 25 samples.
	Whether sample sizes are appropriate to the grain size of the material being sampled.	The sample sizes taken are appropriate relative to the style of mineralisation and analytical methods undertaken.
Quality of assay data and laboratory tests	The nature, quality and appropriateness of the assaying and laboratory procedures used and whether the technique is considered partial or total.	All samples were sent to Intertek Genalysis laboratory for multi-element analysis (4 Acid digestion with ICP-MS and ICP-OES finish) and Au analysis (25g lead fire assay with ICP-OES finish). This method is appropriate for characterisation of lithogeochemistry. All samples that exceeded the upper limit of detection were analysed for Ore Grade Cu by 4 acid digestion with an ICP finish.
	For geophysical tools, spectrometers, handheld XRF instruments, etc, the parameters used in determining the analysis including instrument make and model, reading times, calibrations factors applied and their derivation, etc.	Analysis using the Olympus Vanta handheld XRF was helpful for differentiating lithology type in some cases, but not reported. Reading times were 3 readings 15s, 15s and 10s. Standards and blanks were used that were compatible with the XRF tool and values were monitored.
	Nature of quality control procedures adopted (eg standards, blanks, duplicates, external laboratory checks) and whether	For all sampling, CRMs were utilised every 20 samples. Duplicates were collected every 25 samples. In addition, QAQC data from the lab is also collected. Review of standards and duplicates suggests adequate.

	acceptable levels of accuracy (ie lack of bias) and precision have been established.	
Verification of sampling and assaying	The verification of significant intersections by either independent or alternative company personnel.	Significant results are considered to be: >0.1% Cu, >0.1% Ni, >0.10% Zn, >0.1%Pb and >0.5g/t Au.
	The use of twinned holes	RC hole EHRC004 was drilled to twin an air core drilled in 2021. The hole came up with similar geology until the last 5m.
	Documentation of primary data, data entry procedures, data verification, data storage (physical and electronic) protocols.	Data was capture in field books and put into digital spreadsheets. Data was checked and verified. Digital files were imported into the PUA electronic database. All physical sampling sheets are filed and scanned electronically.
	Discuss any adjustment to assay data.	No adjustments were made to the assay data.
Location of data points	Accuracy and quality of surveys used to locate drill holes (collar and down-hole surveys), trenches, mine workings and other locations used in Mineral Resource estimation.	The location of all collars was by handheld GPS that is accurate to within $\pm 5m$. Downhole surveys were completed by a gyro.
	Specification of the grid system used.	All collars quoted in this Report are using the GDA1994 MGA, Zone 50 coordinate system.
	Quality and adequacy of topographic control.	Topography based on publicly available data.
Data spacing and distribution	Data spacing for reporting of Exploration Results.	The data spacing is not appropriate for a Mineral Resource or Ore Reserve estimation. Samples were collected to test for mineralisation.
	Whether the data spacing and distribution is sufficient to establish the degree of geological and grade continuity appropriate for the Mineral Resource and Ore Reserve estimation procedure(s) and classifications applied.	The aim of the drill program was to test geophysical targets identified from VTEM and geochemical anomalies.
	Whether sample compositing has been applied.	No sample compositing has been applied to the exploration results.

Orientation of data in relation to geological structure	Whether the orientation of sampling achieves unbiased sampling of possible structures and the extent to which this is known, considering the deposit type.	The drill program was completed to test geophysical targets however testing stratigraphy, depth to basement and positions and orientations of faults were secondary goals.
	If the relationship between the drilling orientation and the orientation of key mineralised structures is considered to have introduced a sampling bias, this should be assessed and reported if material.	No orientation sampling bias has been identified.
Sample security	The measures taken to ensure sample security.	Samples were transported from the field directly to the assay laboratory in Perth.
Audits or reviews	The results of any audits or reviews of sampling techniques and data.	Apart from desktop reviews of the historic surface and drill data, no audits have been undertaken.

For personal use only

Section 2: Reporting of Exploration Results

(Criteria listed in the preceding section also apply to this section)

Criteria	JORC Code explanation	Commentary
Mineral tenement and land tenure status	Type, reference name/number, location and ownership including agreements or material issues with third parties such as joint ventures, partnerships, overriding royalties, native title interests, historical sites, wilderness or national park and environmental settings.	Peak Minerals Limited has acquired 100% of Greenrock Metals Pty Ltd and thus 100% of E52/3751. E52/3751 is a granted tenement and is in full force. A 1% NSR is payable for all minerals sold.
	The security of the tenure held at the time of reporting along with any known impediments to obtaining a licence to operate in the area.	No known impediments exist with respect to the exploration or development of the tenement.
Exploration done by other parties	Acknowledgment and appraisal of exploration by other parties.	<p>1969-1972: Near surface copper mineralisation identified by Western Mining Corporation. Vacuum and percussion drilling intersected significant copper anomalism.</p> <p>1982: Esso Exploration explored the Glengarry basin for stratiform lead-zinc and copper. Esso completed broad gravity over the current tenure.</p> <p>1987-1995 - CRAE independently explored the area and recognised a copper anomaly at Cork Tree through regional lag sampling. Follow up auger, RAB and diamond drilling was completed.</p> <p>2003-2012: Giralia Resources NL explored the area with Mt Isa Mines farming into the project in 2002-2003. A three line IP survey (MIMDAS) was completed over the Cork Tree Prospect and rock chip samples were collected.</p> <p>2008-2011: PacMag Ltd joined the JV and completed reconnaissance XRF sampling. In 2011 PacMag withdrew from the joint venture and Giralia was taken over by Atlas Iron.</p> <p>2012-2020: Kalamazoo Resources Limited completed soil sampling, a MLTEM survey, 2 RC holes and a heritage survey over the areas drilled.</p>
Geology	Deposit type, geological setting and style of mineralisation.	<p>Cork Tree has been explored previously for gold and base metals mineralisation associated with long lived and reactivated basin forming structures that were considered capable of being the fluid conduits promoting epigenetic or syngenetic mineralisation.</p> <p>Early ideas combine the structural setting with the prospective lithostratigraphy identifying potential for sediment hosted mineralisation. Recent concepts have modified the focus to being a largely epigenetic style.</p> <p>Syngenetic sedimentary exhalative (SEDEX) style models are applicable to this area. In such a system, a distal mineralising fluid travels along a suitable fault plumbing system until it reaches the surface where it exhales into a low energy environment where it can be preserved as a stratiform deposit.</p> <p>The importance of structures in channelling groundwater during late compression phase of a basin have been more recently recognised as a significant aspect towards controlling mineralisation. Mineralisation is deposited in structural traps within reverse faults and thrusts, especially within a favourable reactive lithological host so that again, mineralisation is stratabound.</p>



<p>Drill hole Information</p>	<p>A summary of all information material to the understanding of the exploration results including a tabulation of the following information for all Material drill holes:</p> <ul style="list-style-type: none"> - easting and northing of the drill hole collar - elevation or RL (Reduced Level - elevation above sea level in metres) of the drill hole collar - dip and azimuth of the hole - down hole length and interception depth - hole length. 	<p>All drill hole locations are described in the tables above, in the body of the text and on related figures.</p> <ul style="list-style-type: none"> -Easting and Northing are given in MGA GDA94 zone 50. -The RL is in metres, AHD -Dip is in inclination of the holes from horizontal and azimuth is reported in magnetic degrees. -Downhole length is the distanced measured along the drill hole trace for an intercept and the depth of intercept is the thickness with a weighted average >0.1% copper, >0.1% lead and 0.5 g/t gold. - The hole length is measured from surface to the end of the hole measured along the hole trace.
	<p>If the exclusion of this information is justified on the basis that the information is not Material and this exclusion does not detract from the understanding of the report, the Competent Person should clearly explain why this is the case.</p>	<p>No information material to the understanding of the exploration results has been excluded.</p>
<p>Data aggregation methods</p>	<p>In reporting Exploration Results, weighting averaging techniques, maximum and/or minimum grade truncations (eg cutting of high grades) and cut-off grades are usually Material and should be stated.</p>	<p>Significant intersections are determined using both qualitative (i.e., geological logging) and quantitative (i.e., lower cut-off) methods. No high grade cut-offs were used. The nominal weighted average lower cut-off for copper is 0.1% Cu, 0.1% for Ni, 0.1%Pb, 0.1% Zn and 0.5gpt Au in this report.</p>
	<p>Where aggregate intercepts incorporate short lengths of high-grade results and longer lengths of low grade results, the procedure used for such aggregation should be stated and some typical examples of such</p>	<p>The highest grade high-grade sulphide or Au intervals internal to broader zones of sulphide mineralisation are reported as included intervals. For example, 5.2m at 0.25% Cu and 0.5m at 0.53% Cu.</p>



	aggregations should be shown in detail.	
	The assumptions used for any reporting of metal equivalent values should be clearly stated.	No metal equivalence data are reported.
Relationship between mineralisation widths and intercept lengths	These relationships are particularly important in the reporting of Exploration Results.	Assay intersections are reported as down hole lengths. At this time the widths of mineralisation have not yet been determined.
	If the geometry of the mineralisation with respect to the drill hole angle is known, its nature should be reported.	The geometry of the mineralisation appears to be mainly horizontal and related to the terra rosa unit, the iron-rich clayey material in the karstic zones. Blebby or replacement copper as chalcopyrite is <2%
	If it is not known and only the down hole lengths are reported, there should be a clear statement to this effect (eg 'down hole length, true width not known').	All intervals are reported as down hole length, true width of mineralisation is not yet known.
Diagrams	Appropriate maps and sections (with scales) and tabulations of intercepts should be included for any significant discovery being reported. These should include, but not be limited to a plan view of drill hole collar locations and appropriate sectional views.	Relevant maps and diagrams have been included in the body of this report. Cross-sections have been shown in 3x vertical exaggeration in order to understand the magnitude of difference between the diamond holes and air core holes.
Balanced reporting	Where comprehensive reporting of all Exploration Results is not practicable, representative reporting of both low and high grades and/or widths should be practiced to avoid misleading reporting of Exploration Results.	All results, greater than 0.1% copper, 0.1% nickel, 0.1% zinc, 0.1% lead and 0.5gpt gold are included in this report. Some dilution is possible or probable in the last 1m interval of EHR004 where the hole intersected water. The sample had lower copper than the samples above and mineralisation within the fines may have been washed away.



<p>Other substantive exploration data</p>	<p>Other exploration data, if meaningful and material, should be reported including (but not limited to): geological observations; geophysical survey results; geochemical survey results; bulk samples – size and method of treatment; metallurgical test results; bulk density, groundwater, geotechnical and rock characteristics; potential deleterious or contaminating substances.</p>	<p>All other relevant data has been included within this report.</p> <p>However, ground conditions within the karstic limestones in the top 50-60m of EHD001 are particularly poor. This is cause of subsurface voids.</p>
<p>Further work</p>	<p>The nature and scale of planned further work (eg tests for lateral extensions or depth extensions or large-scale step-out drilling).</p> <p>Diagrams clearly highlighting the areas of possible extensions, including the main geological interpretations and future drilling areas, provided this information is not commercially sensitive.</p>	<p>The geochemical results from this program indicate that a VMS system is a possible source of the widespread low-grade, epigenetic copper mineralisation though it is not fully conclusive. The mafic rocks interested in EHR004 have not been found within the vicinity and is a piece of evidence that suggests that VMS mineralisation styles are possible.</p> <p>A schematic geological interpretation has been provided but will be further refined as more data becomes available.</p>

For personal use only